







www.durlax.com

Durlax Top Surface Limited

Head Ofiice : Mumbai, Maharashtra, India.

Unit No. 1601, 16th Floor, Synergy Business Park Premises Coop Society Ltd, Bhd Virwani Industrial Estate, Sahakarwadi, Off Vishweshwar Nagar Road, Goregaon (East). Mumbai, Maharashtra, India - 400 063.

• Factory Address : Vapi 396193, Gujarat, India

🕓 +9122 6156 0000 / +91 91377 02122 🖾 Info@durlaxindia.com CIN NO : L74999MH2010PLC202712

PREMIUM SURFACES

PREMIUM COLLECTION

DURLAX REACTEL T. D.


TRUDO PREMIUM SURFACES

AN **aasa**PREMIUM
COLLECTION

www.durlax.com





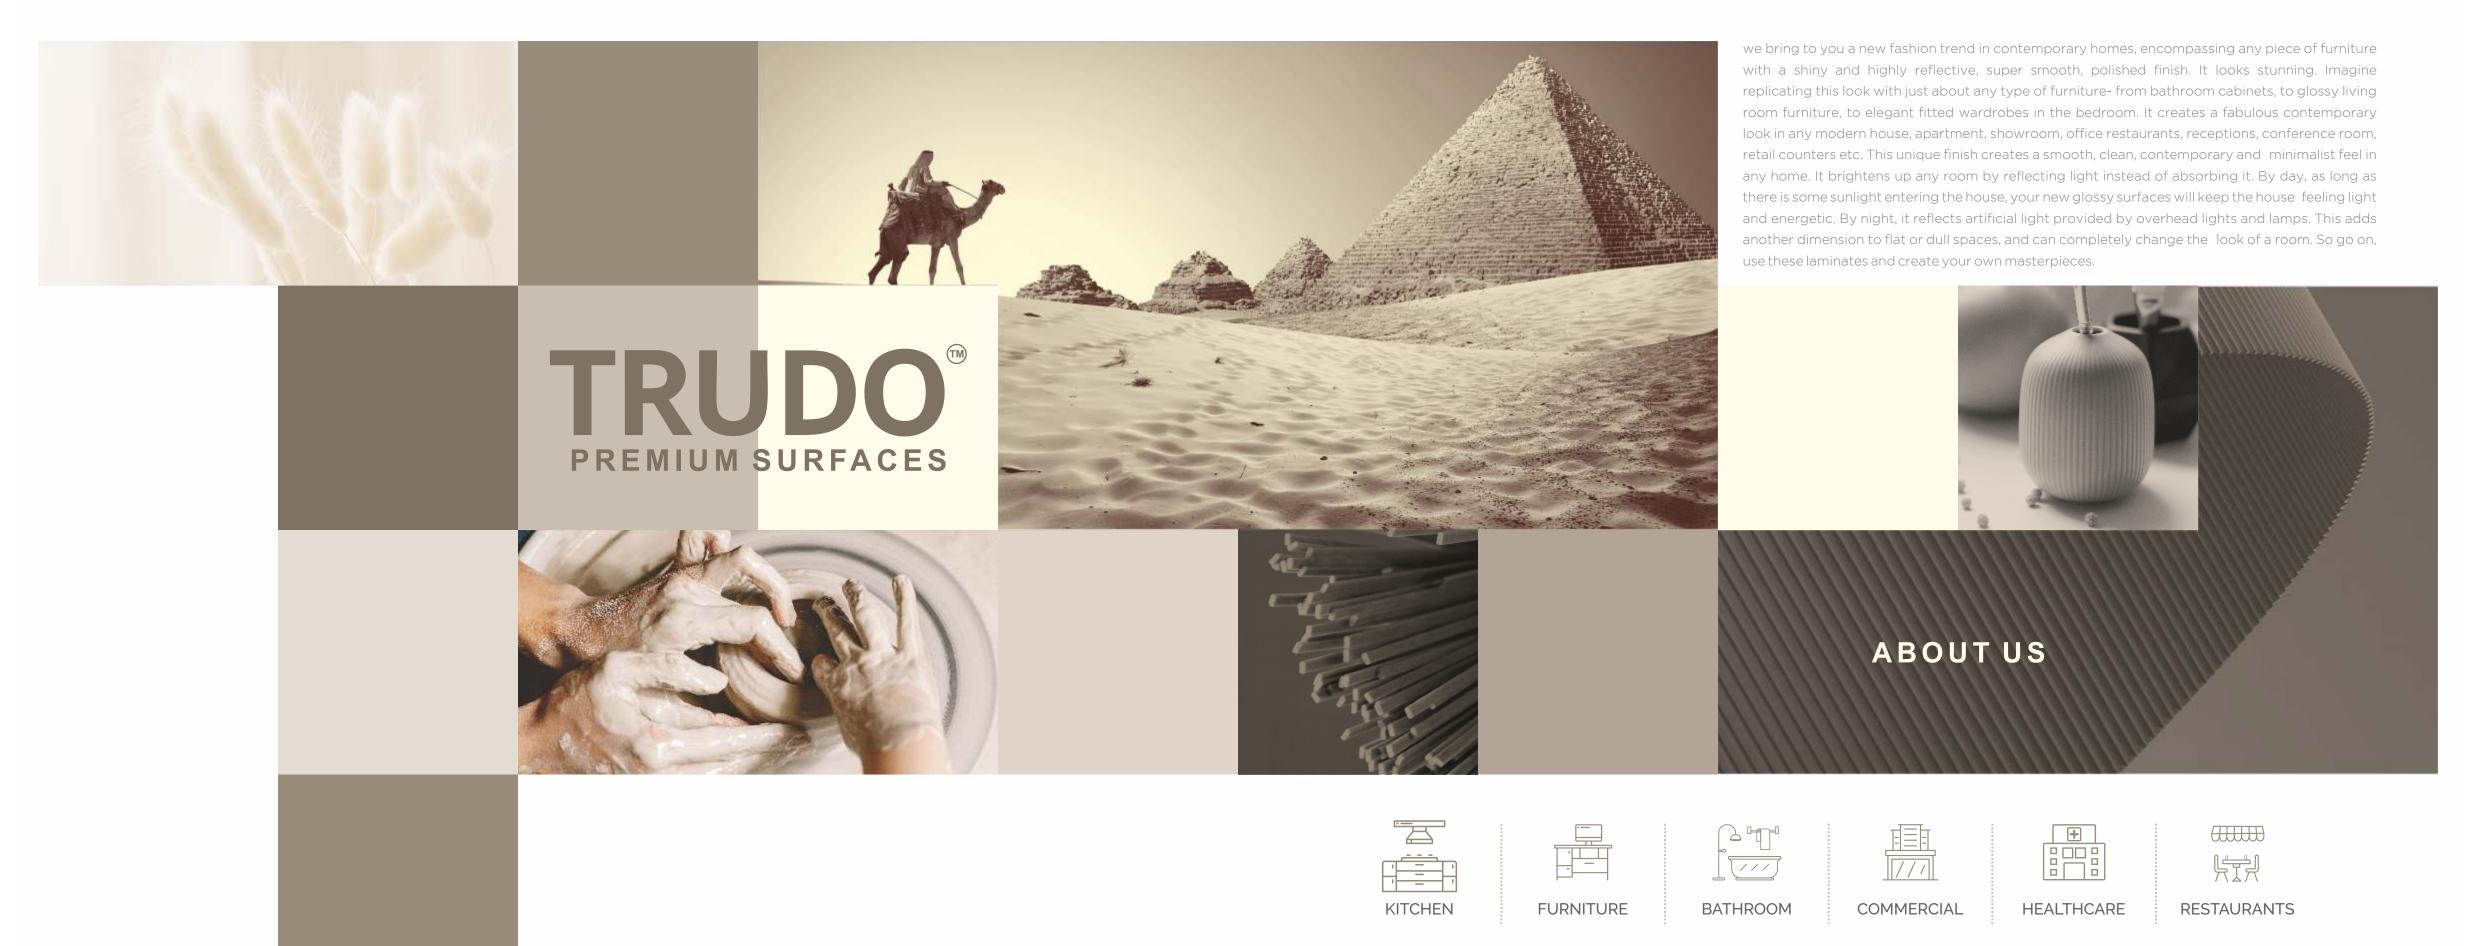





AN aasa Premium Collection 1MM THICKNESS





80 MM X 140 MM

1001 - White



80 MM X 140 MM

1003 - Off White









01 02

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm









80 MM X 140 MM


1004 - Simply White















Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm











80 MM X 140 MM

1007 - Moonlight Silver

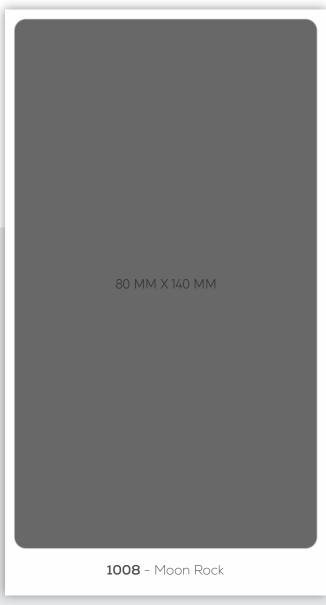

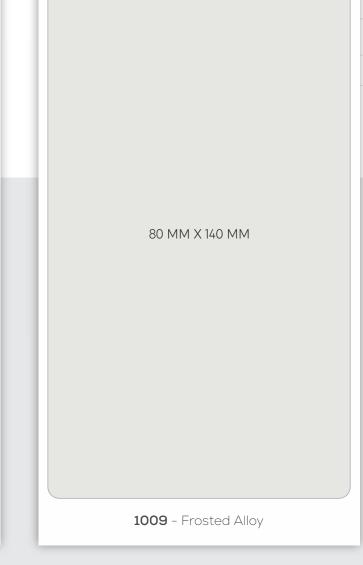










05 06

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm

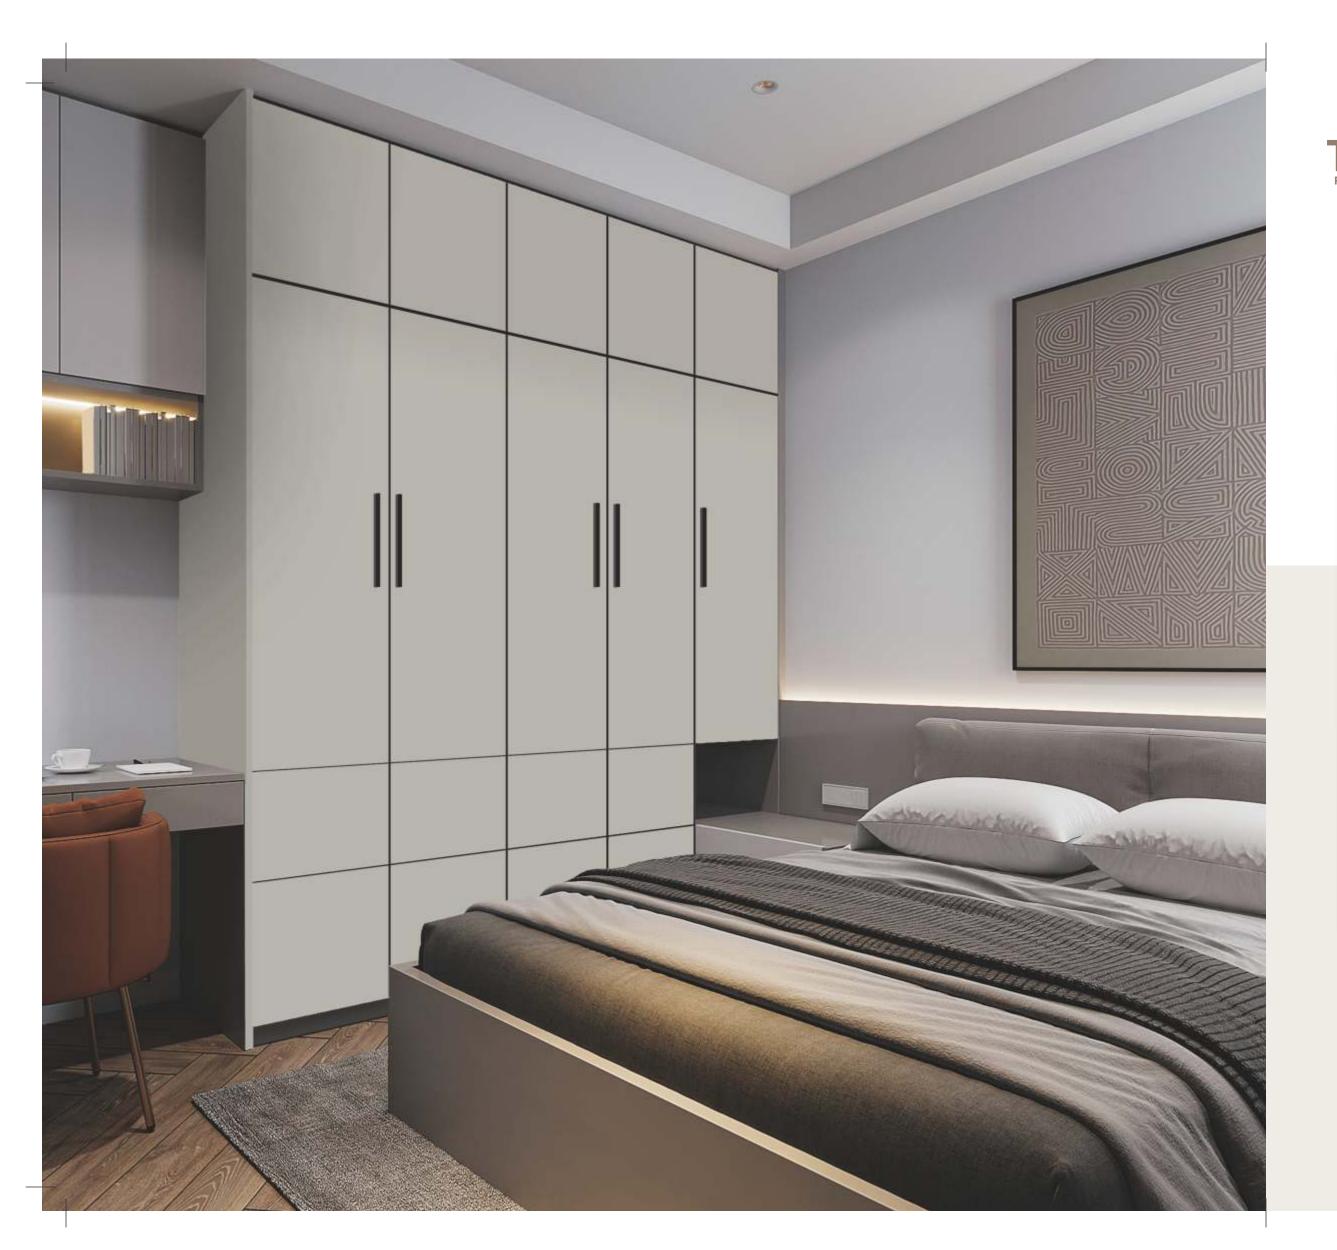







80 MM X 140 MM

1010 - Agreeable Gray



80 MM X 140 MM


1012 - Nuance











80

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm












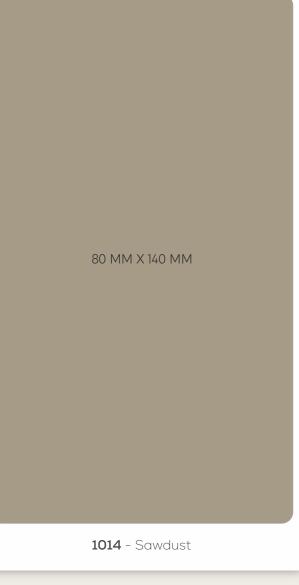











09

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm











80 MM X 140 MM

1016 - Fragile Beauty

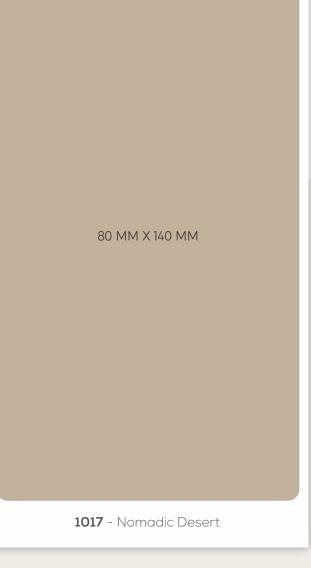

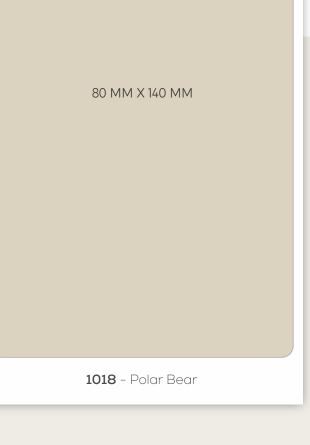









Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm











1038 - Ivoire













1034 - Black Magic

21

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm





AN aasa Premium Collection 1MM THICKNESS






80 MM X 140 MM

1019 - Roman Column



1033 - Iron Ore

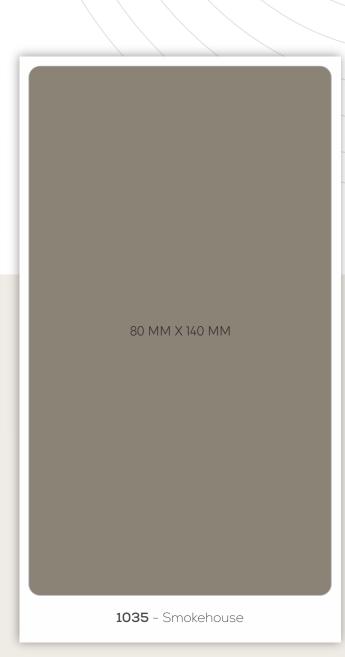









23 24

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm










80 MM X 140 MM

1030 - Restful

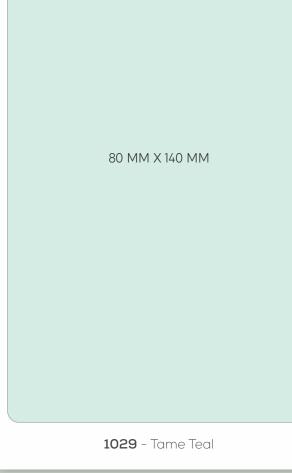













Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm










80 MM X 140 MM

1022 - Aquastone

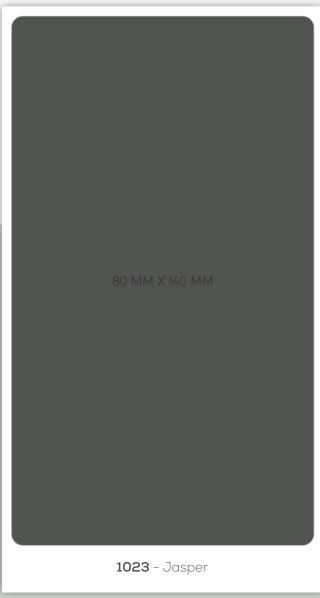

80 MM X 140 MM

1024 - Jasper Stone









Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm









80 MM X 140 MM

1032 - Ibis White





Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm





AN aasa Premium Collection 1MM THICKNESS






80 MM X 140 MM

1031 - Open Air



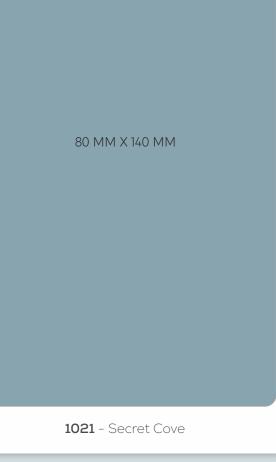









Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm











80 MM X 140 MM

1036 - Greek Villa

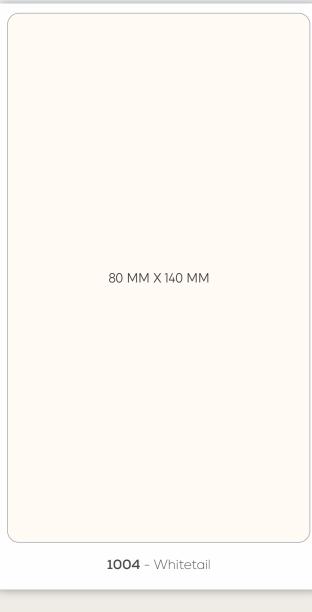

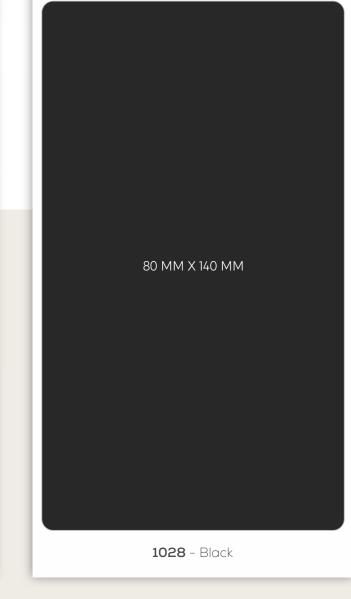









19 20

Sheet Size: 1220mm x 2440mm (4ft x 8 ft) Thickness 1mm

UV Stability / Weather Resistance

Free from all UV Stabilizer's which addresses environment issue's. Always ensure easy coloring and show's mechanical properties in everywhere.

Elastomer keep its properties at low temperature, remedying plastic resin's shortcomings.

Chemical Resistance

It is highly solvent-resistant. It can be applied to a variety of purposes.

GENERAL USE & CARE GUIDE:

DURLAX deco sheet's are designed for easy maintenance and durability. Follow these guidelines for optimal performance:


- 1. Stain Removal: for stubborn stains, use mild household glass cleaners like Colin. Gently wipe the surface with a non-abrasive cloth.
- 2. Avoid Abrasive Cleaners: Refrain from using abrasive liquid cleaners, bleaches, or solvents, as they may harm the deco sheet surface. Clean with water and a non-abrasive cloth.
- 3. Surface Recommendation: Glossy surface's are best suited for vertical applications.
- 4. Thinner Usage: Do not apply thinner to deco sheets.


INSTALLATION INSTRUCTIONS:

- 1. Clean the dust particles from the surface of the substrate (plywood, MDF, chipboard) with a cloth, soft brush, sponge or sandpaper.
- 2. Apply the adhesive evenly with a brush, roller or adhesive spray on both the deco sheet and the substrate (plywood. MDF, chipboard).
- 3. When pressing on the deco sheet base (plywood, MDF, chipboard), use a soft-pressure roller or a normal pressing technique.

 Pressing must be done from the centre of the panel and moved to the sideline and corners of the panel
- 4. Make sure the laminate is sufficiently pressed for almost 24-30 hours to reach full bond strength.





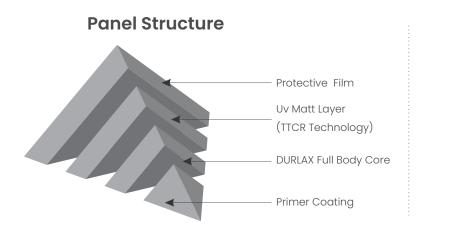





AN **aasa** PREMIUM COLLECTION





OUTSTANDING WEATHER PROOF DURABILITY

DURLAX HAS OUTSTANDING WEATHER-PROOF DURABILITY THAN OTHER RESINS.

	DURLAX	PVC	ACRYLIC	UV
Before	DURLAX - STD	PVC - STD	POLY - STD	UV - STD
After (300 hr)	DURLAX - 300 hr E=2.5	PVC 300 hr	POLY - 300 hr E=3.0	UV - 300 hr E= 10.0

	DURLAX	ACRYLIC
Pencil Hardness	НВ	НВ
Rockwell Hardness	93	87

	ACRYLIC	UV	PVC	DURLAX
Eco-Friendly	x	x	X	✓
Weather Resistance	×	x	\checkmark	✓
Smoothness	x	х	\checkmark	✓
2nd Processability	X	X	\checkmark	\checkmark
A/S Availability	×	x	\checkmark	✓
Heat Resistance	x	х	X	✓

LIMITED WARRANTY:

DURLAX Products undergo rigorous testing to ensure they are reasonably free of defects. When used and fabricated correctly, they will comply with applicable manufacturing specifications within realistic deviations. Prior to installation, we advise customers to thoroughly inspect products. The warranty excludes defects or non-compliance due to:

- Improper handling, transportation, or storage of deco sheet's Incorrect installation or unintended usage
- Lack of maintenance or exposure to high temperatures Unauthorized alterations or outdoor applications
- Exchanges are provided under reasonable circumstances. This brochure serves as a presentation guide, with actual colors potentially differing. Why Polymer Laminates are the Best Choice compare to other laminates?